

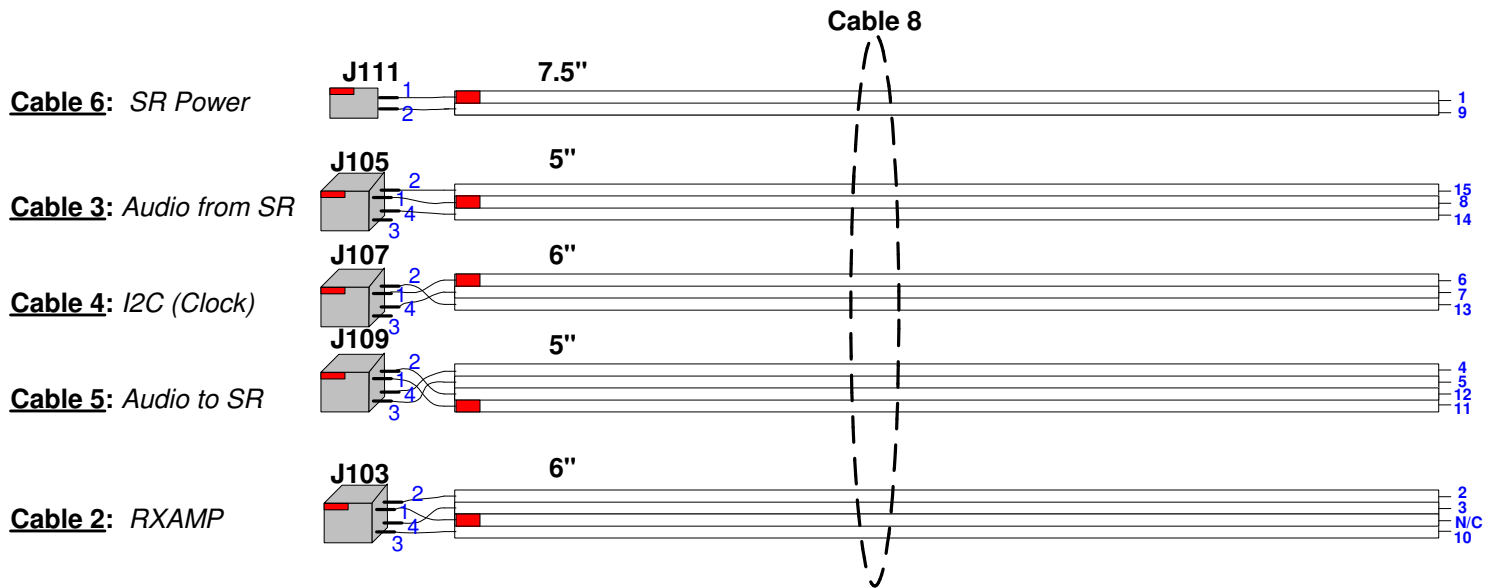


EXTERNAL CABLE CONSTRUCTION DETAIL

Unless otherwise indicated, all cables #26 ribbon cable.
Connections made to standard single- and dual-inline 0.1" header receptacles (solder tail).
All connections to connector pins protected with heatshrink tubing, red denoting pin 1.

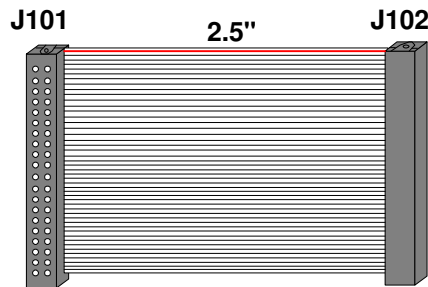

DB-15S
(rear view)

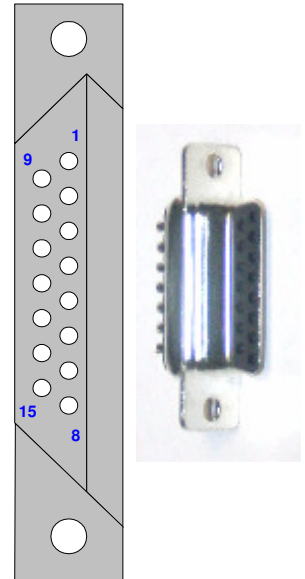

Cable 1: DSP-to-I/O Board

